


WE ALSO DEALS IN



Head Office : Rua General Vieira da Rocha 1373 Beira, Mozambique

Email : CustomerCare@Lucky.co.mz

Website : www.Lucky.co.mz

Contact : +258 - 85 132 0001

We are Available At

* Beira * Nhamatanda * Chimoio * Manica * Tete * Quelimane * Mocuba * Nampula * Nacala * Pemba



LIGHTING CATALOG

We Know all your Lighting Needs



The company was established in the year 2006 and started a unique format of Building and construction material under one roof only.

If luck means hard work, dedication and focus on quality service, then Luck definitely helped Lucky Trading LDA in Central & North Mozambique to establish themselves as one of the top distributors in a very short time.

Having complete knowledge of products sourcing and specialized channel of distribution and integrated knowledge of the supply chain mechanism, it set up a chain of retail stores across Central & North Mozambique in the cities of

- Beira
- Nhamatanda
- Chimoio
- Manica
- Tete
- Quelimane
- Mocuba
- Nampula
- Nacala
- Pemba

Having earned goodwill and trust in the market, the group has been able to contribute and become a significant player in the industry. Lucky Trading LDA started the Construction Material Business with the Team of 8 employees, now has Operational team of over 300+ Employees.

Lucky Trading Lda, started with just Construction material at the beginning, now deals in vast variety of portfolio; i.e.

- Construction Materials
- Automobile Material (Tyres, Battery, Lubrificant, etc)
- Tiles & Mosaic
- Lighting Materials
- Faucets & Sanitary
- Hand & Power tools
- Paints
- Household Materials

And many more....

Technical Terms

IP Rating

IP44 - Protection from the intrusion of water.

IP54 - High level of protection against particles, and a fair amount of protection against water.

IP65 - "dust tight" and protected against water projected from a nozzle

COLOR TEMPERATURE

3000k - Warm Yellow

4000K - Warm White

6000K - Cool White

RGB - Red, Green & Blue



CFL Bulb



2U CFL BULB

- Lampholder : E27
- Power: 11W/20W
- White housing
- Opal PC diffuser



3U CFL BULB

- Lampholder : E27
- Power: 20W/30W
- White housing
- Opal PC diffuser



SPIRAL CFL BULB

- Lampholder : E27
- Power: 11W/26W/40W
- White housing
- Opal PC diffuser



LOTUS CFL BULB

- Lampholder : E27
- Power: 85W/105W/125W
- White housing
- Opal PC diffuser



LED Bulb



LED Bulb lights save 85%, and life is 20 times longer than incandescent .

The future is different ...



A BULE SERIES

ALUMINUM PLASTIC IC CONSTANT CURRENT DRIVE /
LINEAR SERIES / DIMMING SERIES / DIMMING SERIES

- Power :3W/4.5W/6W/7W/9W/12W/15W/18W
- Lampholder : E27/B22
- Input:175-265V/100-285V 50-60Hz
- CRI>80
- Color Temperature: 6000K
- Luminous flux :95lm/W



LED CANDLE BULB

- M5E27 / M5E14
- Lampholder : E14/E27
- Power: 5W
- CRI>80
- Color Temperature: CW 6000K
- White housing
- Opal PC diffuser



LED MAGIC BULB SERIES

- LCQ003002WA01.T-GFC / LCQ004005WA01.T-GFC
- Lampholder : E27
- Power: 2W/5W
- CRI>80
- Color Temperature: RGBW
- Color changing effect by remote control
- White housing
- Opal PC diffuser



LED MAGIC BULB SERIES

- LCQ001004WA01.T-G60
- Lampholder : E27
- Power: 4W
- Input: AC85-265V
- Color Temperature: 6000K
- Rechargeable battery
- Lumen: 150lm-240lm
- Opal PC diffuser



High competitive price



Aluminum plastic material



Constant current design



Convertible light color



Adjust brightness widely



TUBELIGHT



- LED Batten
- Power : 6W/9W
- Color temperature : CW 6500K
- Input : AC200-240V



- Savelite Electronic
- Power : 36W/40W
- Input : AC200-240V



- Ecobox Electronic
- Power : 36W/40W
- Input : AC200-240V



- Fluorescent Tube
- Power : 18W/36W
- Color temperature : CW 6500K
- Input : AC200-240V



- Square LED Downlight
- Power : 6W/9W/12W/15W/18W
- Color temperature : WW 3000K / CW 6500K
- Input : AC200-240V



DOWNLIGHT



- Round LED Downlight
- Power : 6W/9W/12W/15W/18W
- Color temperature : WW 3000K / CW 6500K
- Input : AC200-240V




- WTSD0801
- Power :10W
- Size: Diameter 86mm x H77mm
- Cutout: 70mm
- Color Temperature: WW 3000K / CW 6000K



- W07EBD
- Power :8-10W
- Size: Diameter 100mm x H96mm
- Cutout: 90mm
- Color Temperature: WW 3000K



- WTSD0805
- Power :8-10W
- Size: Diameter 85mm x H65mm
- Cutout: 75mm
- Color Temperature: WW 3000K / CW 6000K

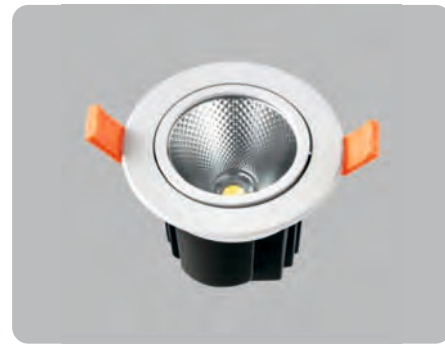

- WTSD1205
- Power :12-15W
- Size: Diameter 110mm x H85mm
- Cutout: 95mm
- Color Temperature: WW 3000K / CW 6000K



- WSD002-4F
- Power :15W
- Size: Diameter 130mm x H110mm
- Cutout: 120mm
- Color Temperature: WW 3000K / CW 6000K



- WSD002-5F
- Power :30W
- Size: Diameter 165mm x H143mm
- Cutout: 155mm
- Color Temperature: WW 3000K / CW 6000K



- W0801-1
- Power :10W
- Size: Diameter 86mm x H77mm
- Cutout: 70mm
- Color Temperature: WW 3000K / CW 6000K



- W0801-2
- Power :8-10W
- Size: Diameter 100mm x H96mm
- Cutout: 90mm
- Color Temperature: WW 3000K





- WSG-A09-W
- Power :12W
- Size: Diameter: 75x103x185mm
- Input:165-265V
- Color:White
- Color Temperature: 3000K / 6000K
- Luminous flux :80lm/W



- WSG-A09-B
- Power :12W
- Size: Diameter: 75x103x185mm
- Input:165-265V
- Color:Black
- Color Temperature: 3000K / 6000K
- Luminous flux :80lm/W

- Aluminum Track for WSG-A09-B & WSG-A09-W
- Size: 1 meter
- Color:White / Black





- MT8418
- T8 Grid Panel
- Size: 600x600mm
- With wiring layout for LED tube




T8 LED TUBE

double ended input


- T8 9W-0.6M
- Power :9W / L:600mm
- Input:110-265V 50-60Hz
- Color Temperature: Cool White 6000K



LED Back Light Panel

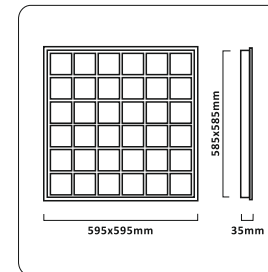


- W361LPT
- LED Grid Panel Light
- Power : 40W
- Size: 595x595mm
- Color temperature : WW 3000K / CW 6500K

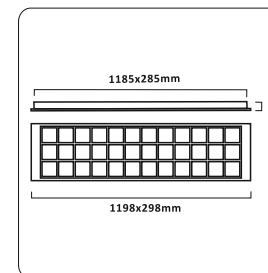


- W36L1LPT
- LED Grid Panel Light
- Power : 40W
- Size: 1195x295mm
- Color temperature : WW 3000K / CW 6500K




Ultra thin LED Flat Panel

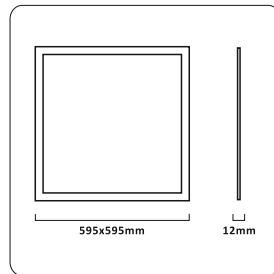

- W402LPT
- LED Flat Panel Light
- Power : 40W
- Size: 595x595mm
- Color temperature : WW 3000K / CW 6500K

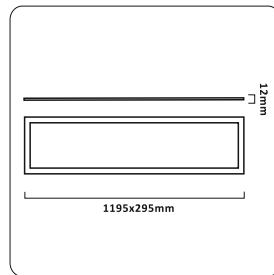

- W40L2LPT
- LED Flat Panel Light
- Power : 40W
- Size: 1195x295mm
- Color temperature : WW 3000K / CW 6500K

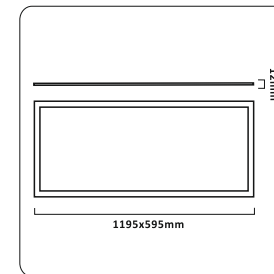

- W40W2LPT
- LED Flat Panel Light
- Power : 72W
- Size: 1195x595mm
- Color temperature : WW 3000K / CW 6500K





·WCL24W
 ·Power :24W
 ·Size: Diameter 380mm x H50mm
 ·Color Temperature: CW 6000K



·WCL36W
 ·Power :36W
 ·Size: Diameter 480mm x H90mm
 ·Color Temperature: CW 6000K



·W120LDSM-R
 ·Power :12W
 ·Size: Diameter 170mm x H40mm
 ·Color Temperature: WW 3000K / CW 6500K



·W120LDSM-S
 ·Power :12W
 ·Size: 170x170 x H40mm
 ·Color Temperature: WW 3000K / CW 6500K



·W001A-4F-A
 ·Power :12W
 ·Color : White
 ·Size: Diameter 128mm x H105mm
 ·Color Temperature: WW 3000K / CW 6500K





·W001A-4F-B
 ·Power :12W
 ·Color : Black
 ·Size: Diameter 128mm x H128mm
 ·Color Temperature: WW 3000K / CW 6500K



·W240LDSM-R
 ·Power :24W
 ·Size: Diameter 300mm x H40mm
 ·Color Temperature: WW 3000K / CW 6500K




·W240LDSM-S
 ·Power :24W
 ·Size: 300 x 300 x H143mm
 ·Color Temperature: WW 3000K / CW 6500K

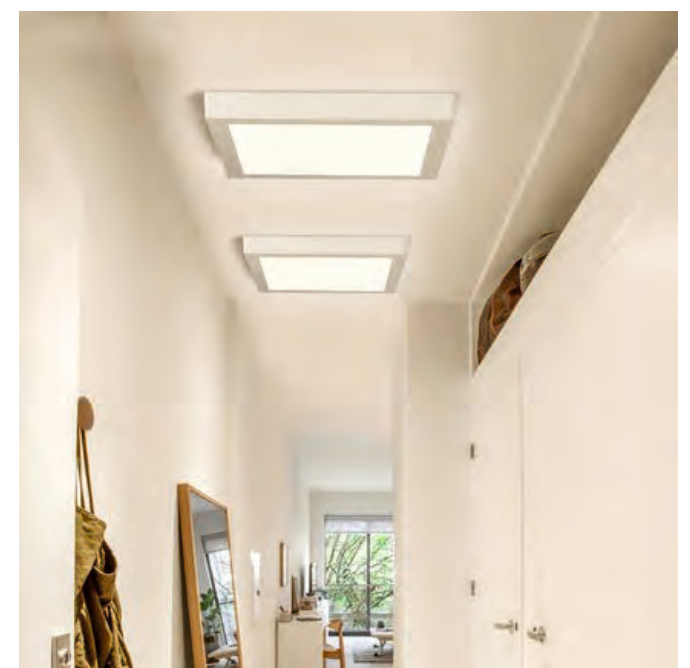
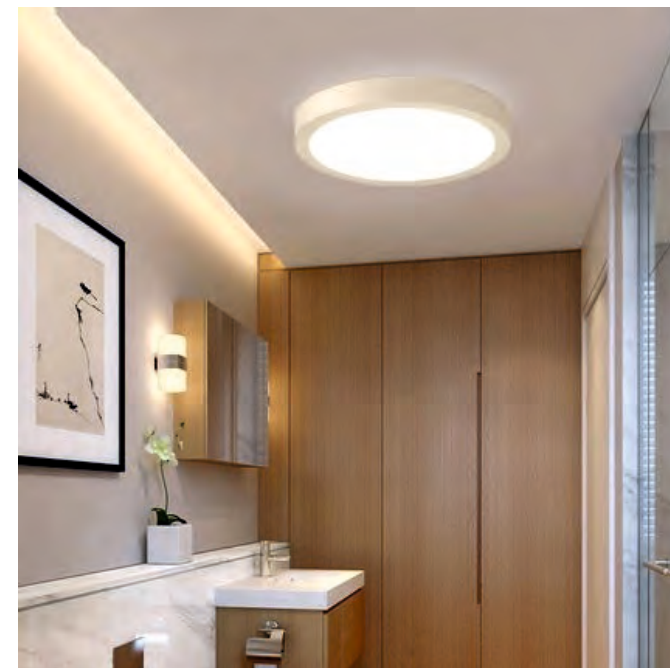




DECO-STRIP

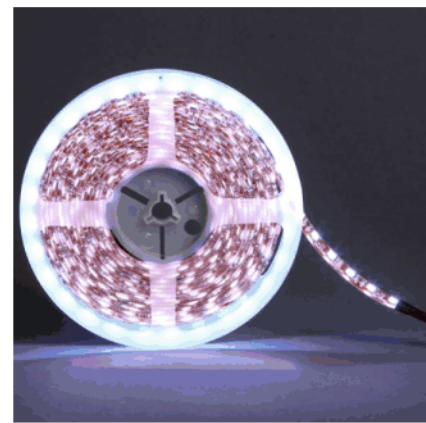

- W5050LV60
- LED Strip low voltage
- Power :12W-14W per meters
- Color: 3000K/6000K/ RGB Color
- 5050 Chipsets
- 60pcs Chips per meters
- Wide: 10mm
- Input:12V
- 5 meters per roll
- Work with transformer

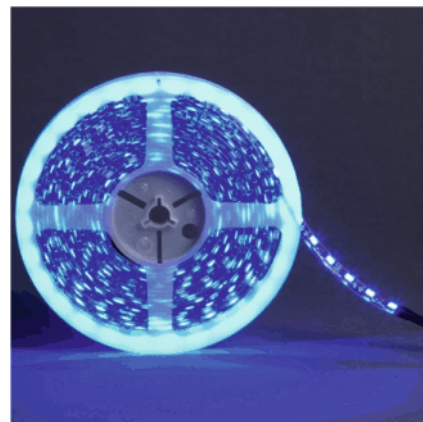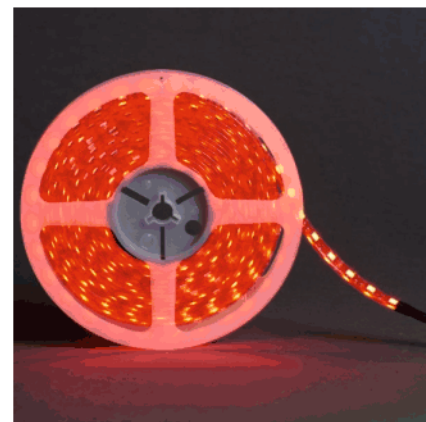

List of Accessories for LED Deco-strip light



Connector for single color led strip



Connector for RGB led strip



Connector with transformer wiring for single color led strip



Connector with transformer wiring for RGB color led strip



RGB remote controller for RGB color led strip




100W transformer for led strip



150W transformer for led strip



200W transformer for led strip

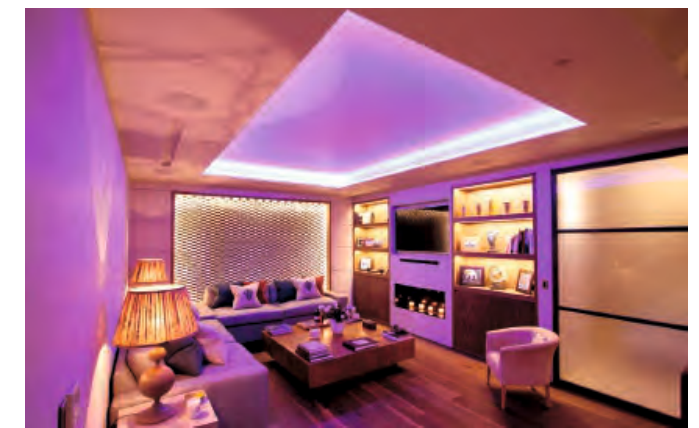



COB High Bays



- W50LGK
- Power: 50W
- Input: 85-265V 50-60Hz
- Color: Silver
- Color Temperature: WW 3000K / CW 6000K
- Beam Angle: 120°
- Luminous flux :110lm/W



- W100LGK
- Power: 100W
- Input: 85-265V 50-60Hz
- Color: Silver
- Color Temperature: WW 3000K / CW 6000K
- Beam Angle: 120°
- Luminous flux :110lm/W





LED ROCKET HIGHBAY

- > 45/ 90/ 120 Beam Angle
- > Silver / Black color housing
- > Available for PC reflector , Aluminum reflector and Diamond reflector

Lighting Type - General Lighting

Application - Warehousing , Industrial , High Ceilinged areas

Architectural Segment - Industry



PC Reflector
45 degree



Alu. Reflector
45/90/120 degree



Diamond Reflector
45/120 degree




- **W80LGK-R**
- Power :80W
- Size: 182x163x390mm
- Die-casting Aluminum
- Input:85-265V 50-60Hz
- Color:Silver
- Color Temperature: WW 3000K / CW 6000K




- **W150LGK-R**
- Power :150W
- Size: 255x255x390mm
- Die-casting Aluminum
- Input:85-265V 50-60Hz
- Color:Silver
- Color Temperature: WW 3000K / CW 6000K



- **W250LGK-R**
- Power :250W
- Size: 300x300x360mm
- Die-casting Aluminum
- Input:85-265V 50-60Hz
- Color:Silver
- Color Temperature: WW 3000K / CW 6000K

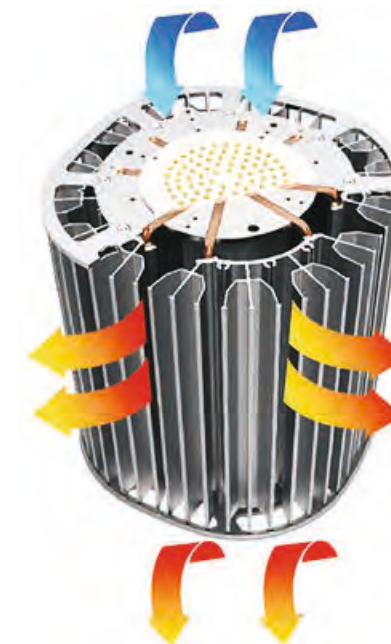

**New technology
Copper heat conduction**





COB STREET LIGHT



- W-L9003-50
- Power :50W
- Size: 530x250x90mm/ Pole : ϕ 50mm
- Die-casting Aluminum
- Input:85-265V 50-60Hz
- Color:Grey
- Color Temperature: WW 3000K / CW 6000K



- W-L9003-100
- Power :100W
- Size: 650x250x90mm/ Pole : ϕ 60mm
- Die-casting Aluminum
- Input:85-265V 50-60Hz
- Color:Grey
- Color Temperature: WW 3000K / CW 6000K



- W-L9003-150
- Power :150W
- Size: 800x310x120mm/ Pole : ϕ 60mm
- Die-casting Aluminum
- Input:85-265V 50-60Hz
- Color:Grey
- Color Temperature: WW 3000K / CW 6000K



- W-L9003-180
- Power :180W
- Size: 800x310x120mm/ Pole : ϕ 60mm
- Die-casting Aluminum
- Input:85-265V 50-60Hz
- Color:Grey
- Color Temperature: WW 3000K / CW 6000K



ALL-IN ONE Solar Street Light


ALL-IN-ONE SOLAR STREET LIGHT FEATURES:

- > Integrated design, Led lamp, solar panel, PIR sensor, controller, battery all together in one body housing;
- > Auto On/OFF;
- > No need connect the cables;
- > Easy to install and No need maintain;
- > Three smart working mode: PIR sensor / time control / PIR sensor + time control;
- > Super high luminous efficiency: >180lm/W, energy and cost saving;
Can work 10-12 hours at night and 3-5 days without sun.

- > **Power: 50Watts**
- > **Color Temperature : CW 6000K**
- > **Philip led chips**

Solar Panel


High efficiency monocrystalline panel, IP65 junction box, A class, Auto-washed tempered glass, 25 years lifespan

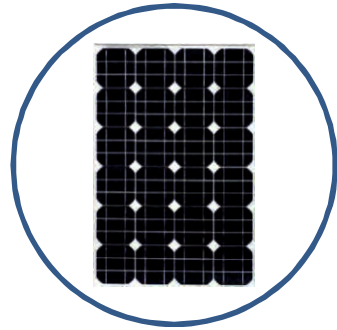

Led Light


Super bright 5050 chips, >180lm/W
IP67 waterproof,
>50000h lifespan

>180lm/w

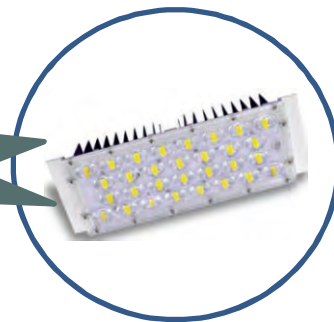


Lithium Battery

Deep cycle,
Over charge and discharge protection,
Free maintenance,
>8years lifespan

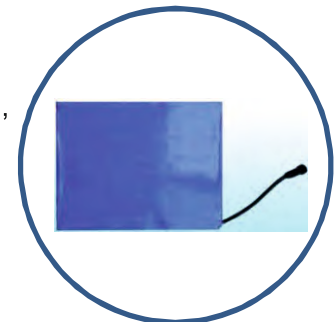

Light Pole

Q235 steel grade, hot-dip galvanized,
Spray coated surface treatment,
Resistance to wind >160KM/H

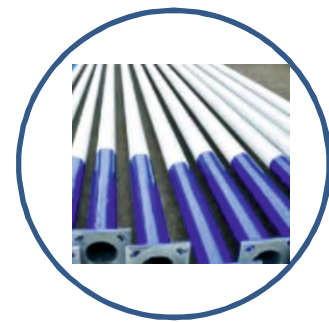

Controller

Smart MPPT controller,
PIR / Time dimmable,
Remote control technology



Working Mode


A. PIR Motion Sensor:

When some one enter the induction range, the light will be full power lighting; Other time will be in saving mode, only 30% power lighting. Sensing distance is 12M .




B. Timer Controller:

Different time with different power, it can be set according to your requirements.

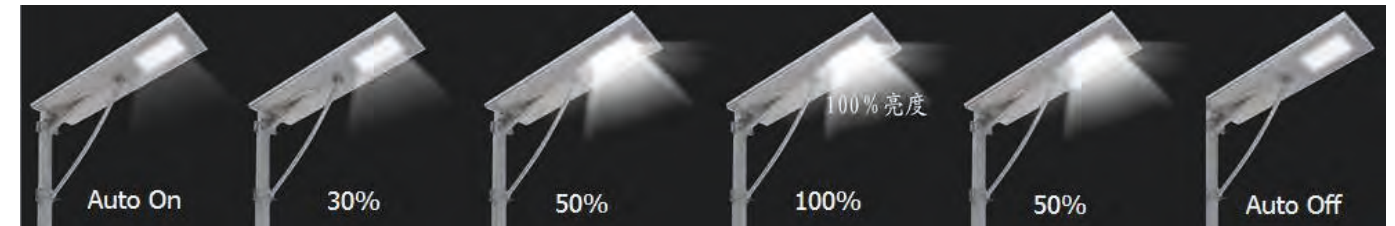

C. PIR Motion Sensor + Timer Controller

When the dark is falling and the traffic is busy, it can be use Timer Controller with different Watt Mode; In the early morning, few cars and people, it can be used PIR sensor, when someone comes, lights can also be full power lighting.

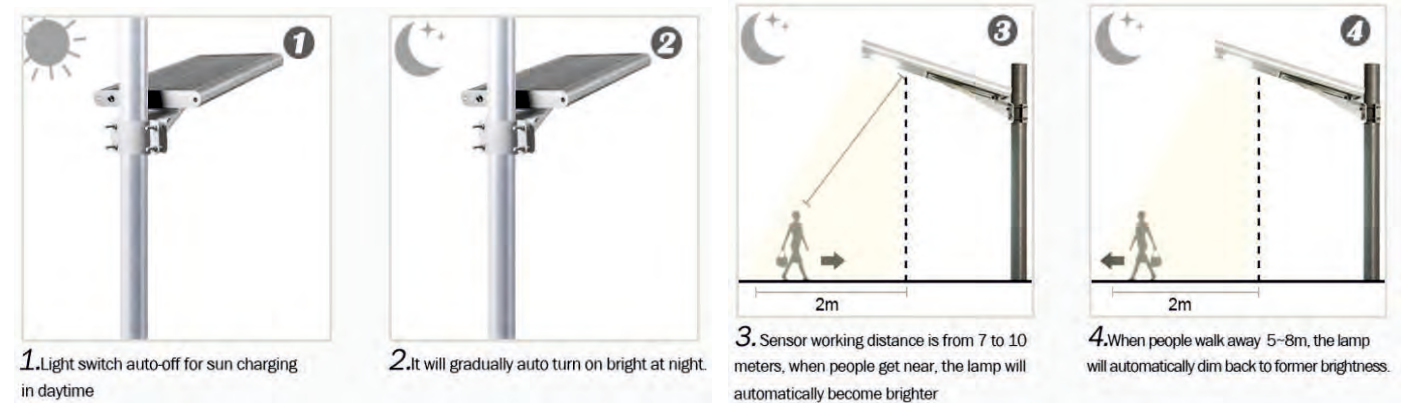

50W



IP65

- W50LSD
- Power :50W
- Size: 314x88x227mm
- Beam Angle :90 degree
- Input:85-265V 50-60Hz
- Color:Black
- Color Temperature: WW 3000K / CW 6500K

100W



IP65


- W100LSD
- Power :100W
- Size: 314x176x227mm
- Beam Angle :90 degree
- Input:85-265V 50-60Hz
- Color:Black
- Color Temperature: WW 3000K / CW 6500K

150W



IP65

- W150LSD
- Power :150W
- Size: 314x264x227mm
- Beam Angle :90 degree
- Input:85-265V 50-60Hz
- Color:Black
- Color Temperature: WW 3000K / CW 6500K

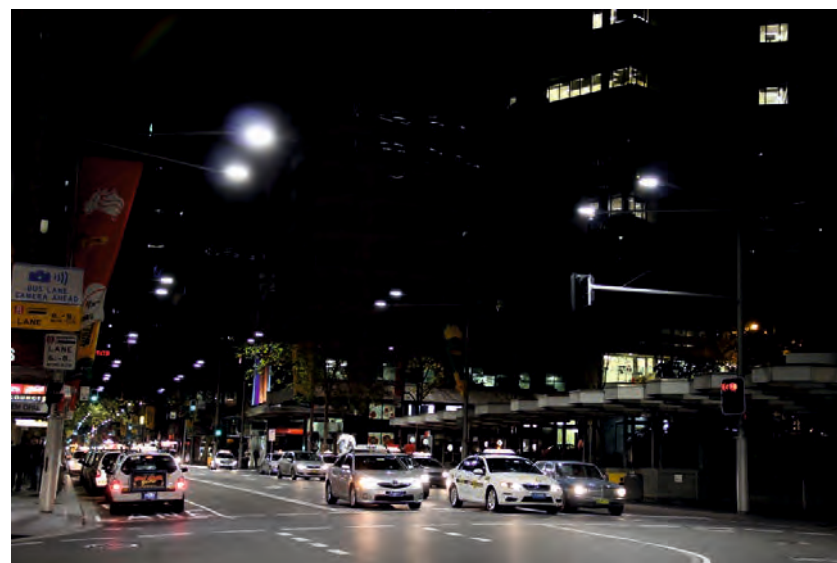

Exterior



Grounds



Terraces




Yard



iPad LED Floodlight



- > 10-200Watts available for different project
- > Ultra thin & Modern design
- > Isoated driver 85-265V 50-60Hz
- > SanAn Chips
- > 120 degree Beam Angle
- > IP65
- > 360 degree Rotation Bracket
- > 3Years Warranty

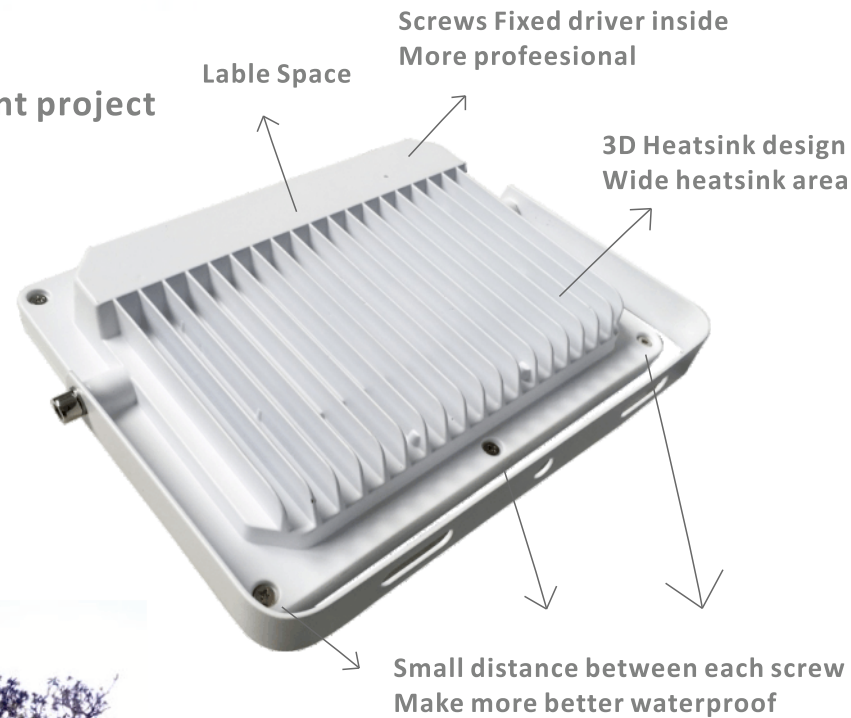

Application

Exterior

Uses:

Grounds

Terraces

Yard



- W20TLF-I
- Power :20W
- Size: 170x35x127mm
- Die-casting Aluminum
- Input:85-265V 50-60Hz
- Color:Grey
- Color Temperature: WW 3000K / CW 6000K



- W50TLF-I
- Power :50W
- Size: 252x43x190mm
- Die-casting Aluminum
- Input:85-265V 50-60Hz
- Color:Grey
- Color Temperature: WW 3000K / CW 6000K



- W100TLF-I
- Power :100W
- Size: 334x55x258mm
- Die-casting Aluminum
- Input:85-265V 50-60Hz
- Color:Grey
- Color Temperature: WW 3000K / CW 6000K



- W150TLF-I
- Power :150W
- Size: 380x66x280mm
- Die-casting Aluminum
- Input:85-265V 50-60Hz
- Color:Grey
- Color Temperature: WW 3000K / CW 6000K



- W200TLF-I
- Power :200W
- Size: 450x80x330mm
- Die-casting Aluminum
- Input:85-265V 50-60Hz
- Color:Grey
- Color Temperature: WW 3000K / CW 6000K



- **W0202SLF-R**
- Power :20W
- Size: 153x183x53mm
- Die-casting Aluminum
- Input:85-265V 50-60Hz
- Color:Black
- Color Temperature: WW 3000K / CW 6000K



- **W0302SLF-R**
- Power :30W
- Size: 193x228x57mm
- Die-casting Aluminum
- Input:85-265V 50-60Hz
- Color:Black
- Color Temperature: WW 3000K / CW 6000K



- **W1002SLF-R**
- Power :100W
- Size: 290x360x90mm
- Die-casting Aluminum
- Input:85-265V 50-60Hz
- Color:Black
- Color Temperature: WW 3000K / CW 6000K



- **W302TLF**
- Power :30W
- IP65
- Die-casting Aluminum
- Input:85-265V 50-60Hz
- Color:Black
- Color Temperature: WW 3000K / CW 6000K



- **W502TLF**
- Power :50W
- IP65
- Die-casting Aluminum
- Input:85-265V 50-60Hz
- Color:Black
- Color Temperature: WW 3000K / CW 6000K



- **W802TLF**
- Power :80W
- IP65
- Die-casting Aluminum
- Input:85-265V 50-60Hz
- Color:Black
- Color Temperature: WW 3000K / CW 6000K



- **W1602TLF**
- Power :160W
- IP65
- Die-casting Aluminum
- Input:85-265V 50-60Hz
- Color:Black
- Color Temperature: WW 3000K / CW 6000K

Application



Exterior

Uses:



W-LW30631



- W-LW30631
- Power :8W
- IP54
- Die-casting Aluminum
- Input:85-265V 50-60Hz
- Color:Black
- Color Temperature: WW 3000K / CW 6500K

W-LW30632



- W-LW30632
- Power :8W
- IP54
- Die-casting Aluminum
- Input:85-265V 50-60Hz
- Color:Black
- Color Temperature: WW 3000K / CW 6500K



W-LW911



- W-LW911
- Power :6W
- IP54
- Die-casting Aluminum
- Input:85-265V 50-60Hz
- Color:White
- Color Temperature: WW 3000K / CW 6500K

W-LW907



- W-LW907
- Power :5W
- IP54
- Die-casting Aluminum
- Input:85-265V 50-60Hz
- Color:White
- Color Temperature: WW 3000K / CW 6500K




GLOBE LIGHT



GD001-B-200-S1



GD001-B-200-W1




GD001-S-200-W1


- GD012
- Color:Opal
- Material: PMMA
- IP44
- Diameter:200mm
- With E27 lampholder



GD001-B-200-S1



GD001-B-200-W1



GD001-S-200-W1


- GD012
- Color: Golden Prismatic
- Material: PMMA
- IP44
- Diameter:200mm
- With E27 lampholder



GD012-B-200-S1




GD012-B-200-W1



GD012-S-200-W1


- GD012
- Color:Clear
- Material: PMMA
- IP44
- Diameter:200mm
- With E27 lampholder

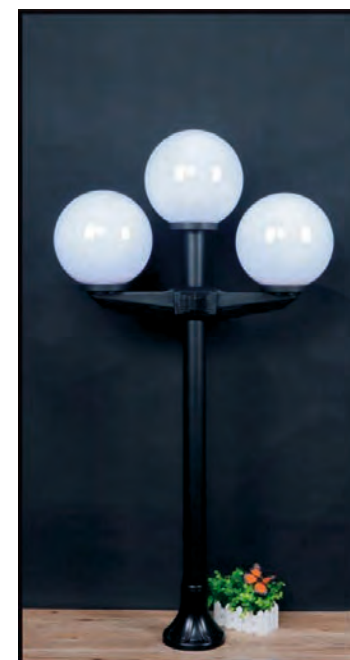

- GD001-B-250-B1-1.8M-2H-K
- Color:Opal
- Material: PMMA
- IP44
- Diameter:250mm
- With 1.8m Pole
- With E27 lampholder




- GD001-B-250-B1-1.8M-F
- Color:Opal
- Material: PMMA
- IP44
- Diameter:250mm
- With 1.8m Pole and basket
- With E27 lampholder

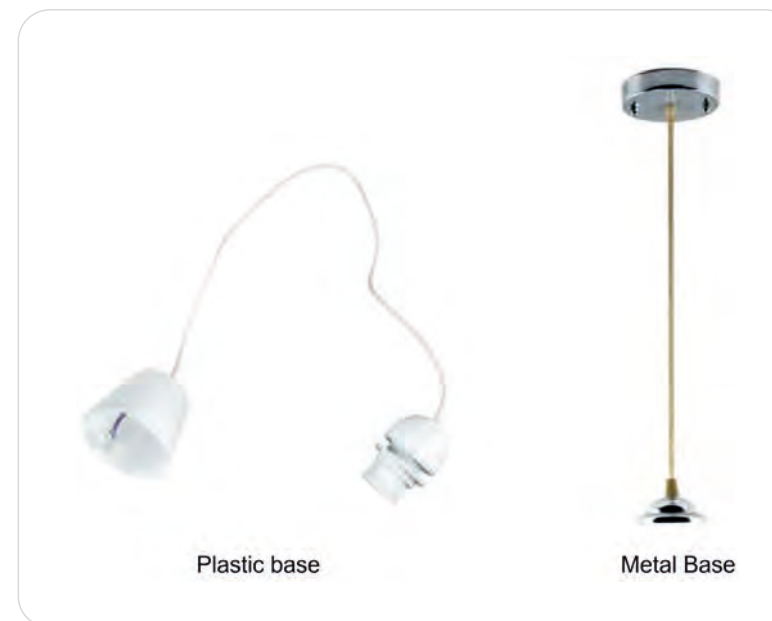


- GLOBE LIGHT With Hanging Wiring
- Material: PMMA
- IP44
- Diameter:250mm
- With 1m hanging wiring
- With E27 lampholder



- LW30111
- Color: Clear
- Material: PMMA
- IP54
- Diameter: 280mm
- With E27 lampholder



LW 30161
 W250 x H250 x D110mm
 LED / E27 x 9W
 Aluminum
 CE RoHS IP65



LW 30162
 W250 x H250 x D115mm
 LED / E27 x 9W
 Aluminum
 CE RoHS IP65

OUTDOOR WALL LIGHT



LW 30201
W270 x H165 x D85 mm
LED
Aluminum
CE, RoHS, IP65, ENEC



LW 30202
W215 x H130 x D70 mm
LED
Aluminum
CE, RoHS, IP65, ENEC



LW 30203
W155 x H100 x D50 mm
LED
Aluminum
CE, RoHS, IP65, ENEC



LW 30211
Ø245 x H80 mm
LED
Aluminum
CE, RoHS, IP65, ENEC



LW 30212
Ø190 x H70 mm
LED
Aluminum
CE, RoHS, IP65, ENEC



LW 30213
Ø160 x H60 mm
LED
Aluminum
CE, RoHS, IP65, ENEC



LW 30251
 W280 x H130 x D160mm
 LED / E27 x 1 max 60W
 Aluminum
 CE CCC IP65

OUTDOOR WALL LIGHT






LW 03591A




LW 03591B



LW 03591C




LW 03591A/B/C
 A-Ø350 x D130mm
 B-Ø260 x D110mm
 C-Ø150 x D95mm
 LED / E27
 Aluminum
 CE CCC IP65

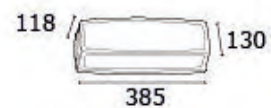

LW 30331
 W385 x H130 x D118 mm
 LED
 Aluminum
 CE, RoHS, IP65, ENEC




LW 30332
 W260 x H110 x D110 mm
 LED
 Aluminum
 CE, RoHS, IP65, ENEC

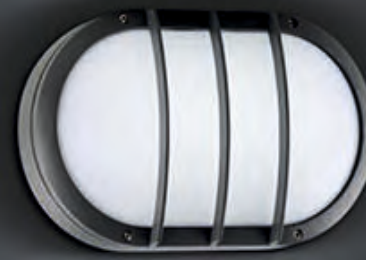


dimension:



LW 30341A/B/C
 A-W214 x H130 x D64mm
 B-W275 x H180 x D100mm
 C-W340 x H210 x D108mm
 LED / E27 x 1
 Aluminum
 CE, RoHS, IP65, ENEC




LW 30521
 W120 x H245 x D80mm
 LED / E27 x 13W
 Aluminum
   





LW 30522
 W120 x H245 x D80mm
 LED / E27 x 13W
 Aluminum
   




LW 30523
 W165 x H245 x D180mm
 LED / E27 x 13W
 Aluminum
   



LW 30541
 H185 x D103mm
 LED / G5.3
 Aluminum
   

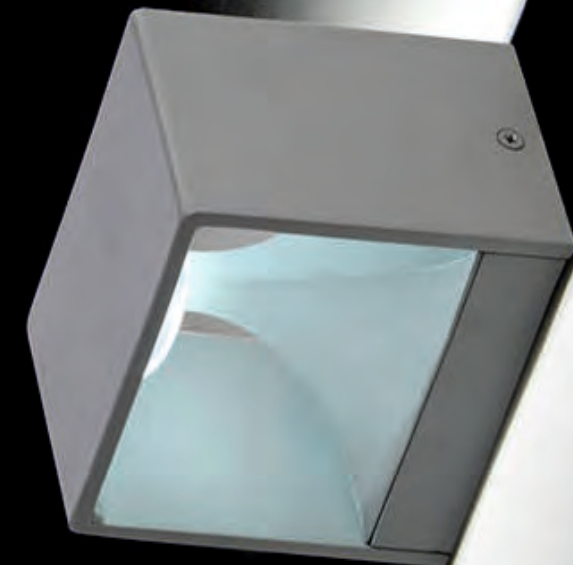

LW 30542
 W115 x H80 x D120mm
 LED
 Aluminum
   

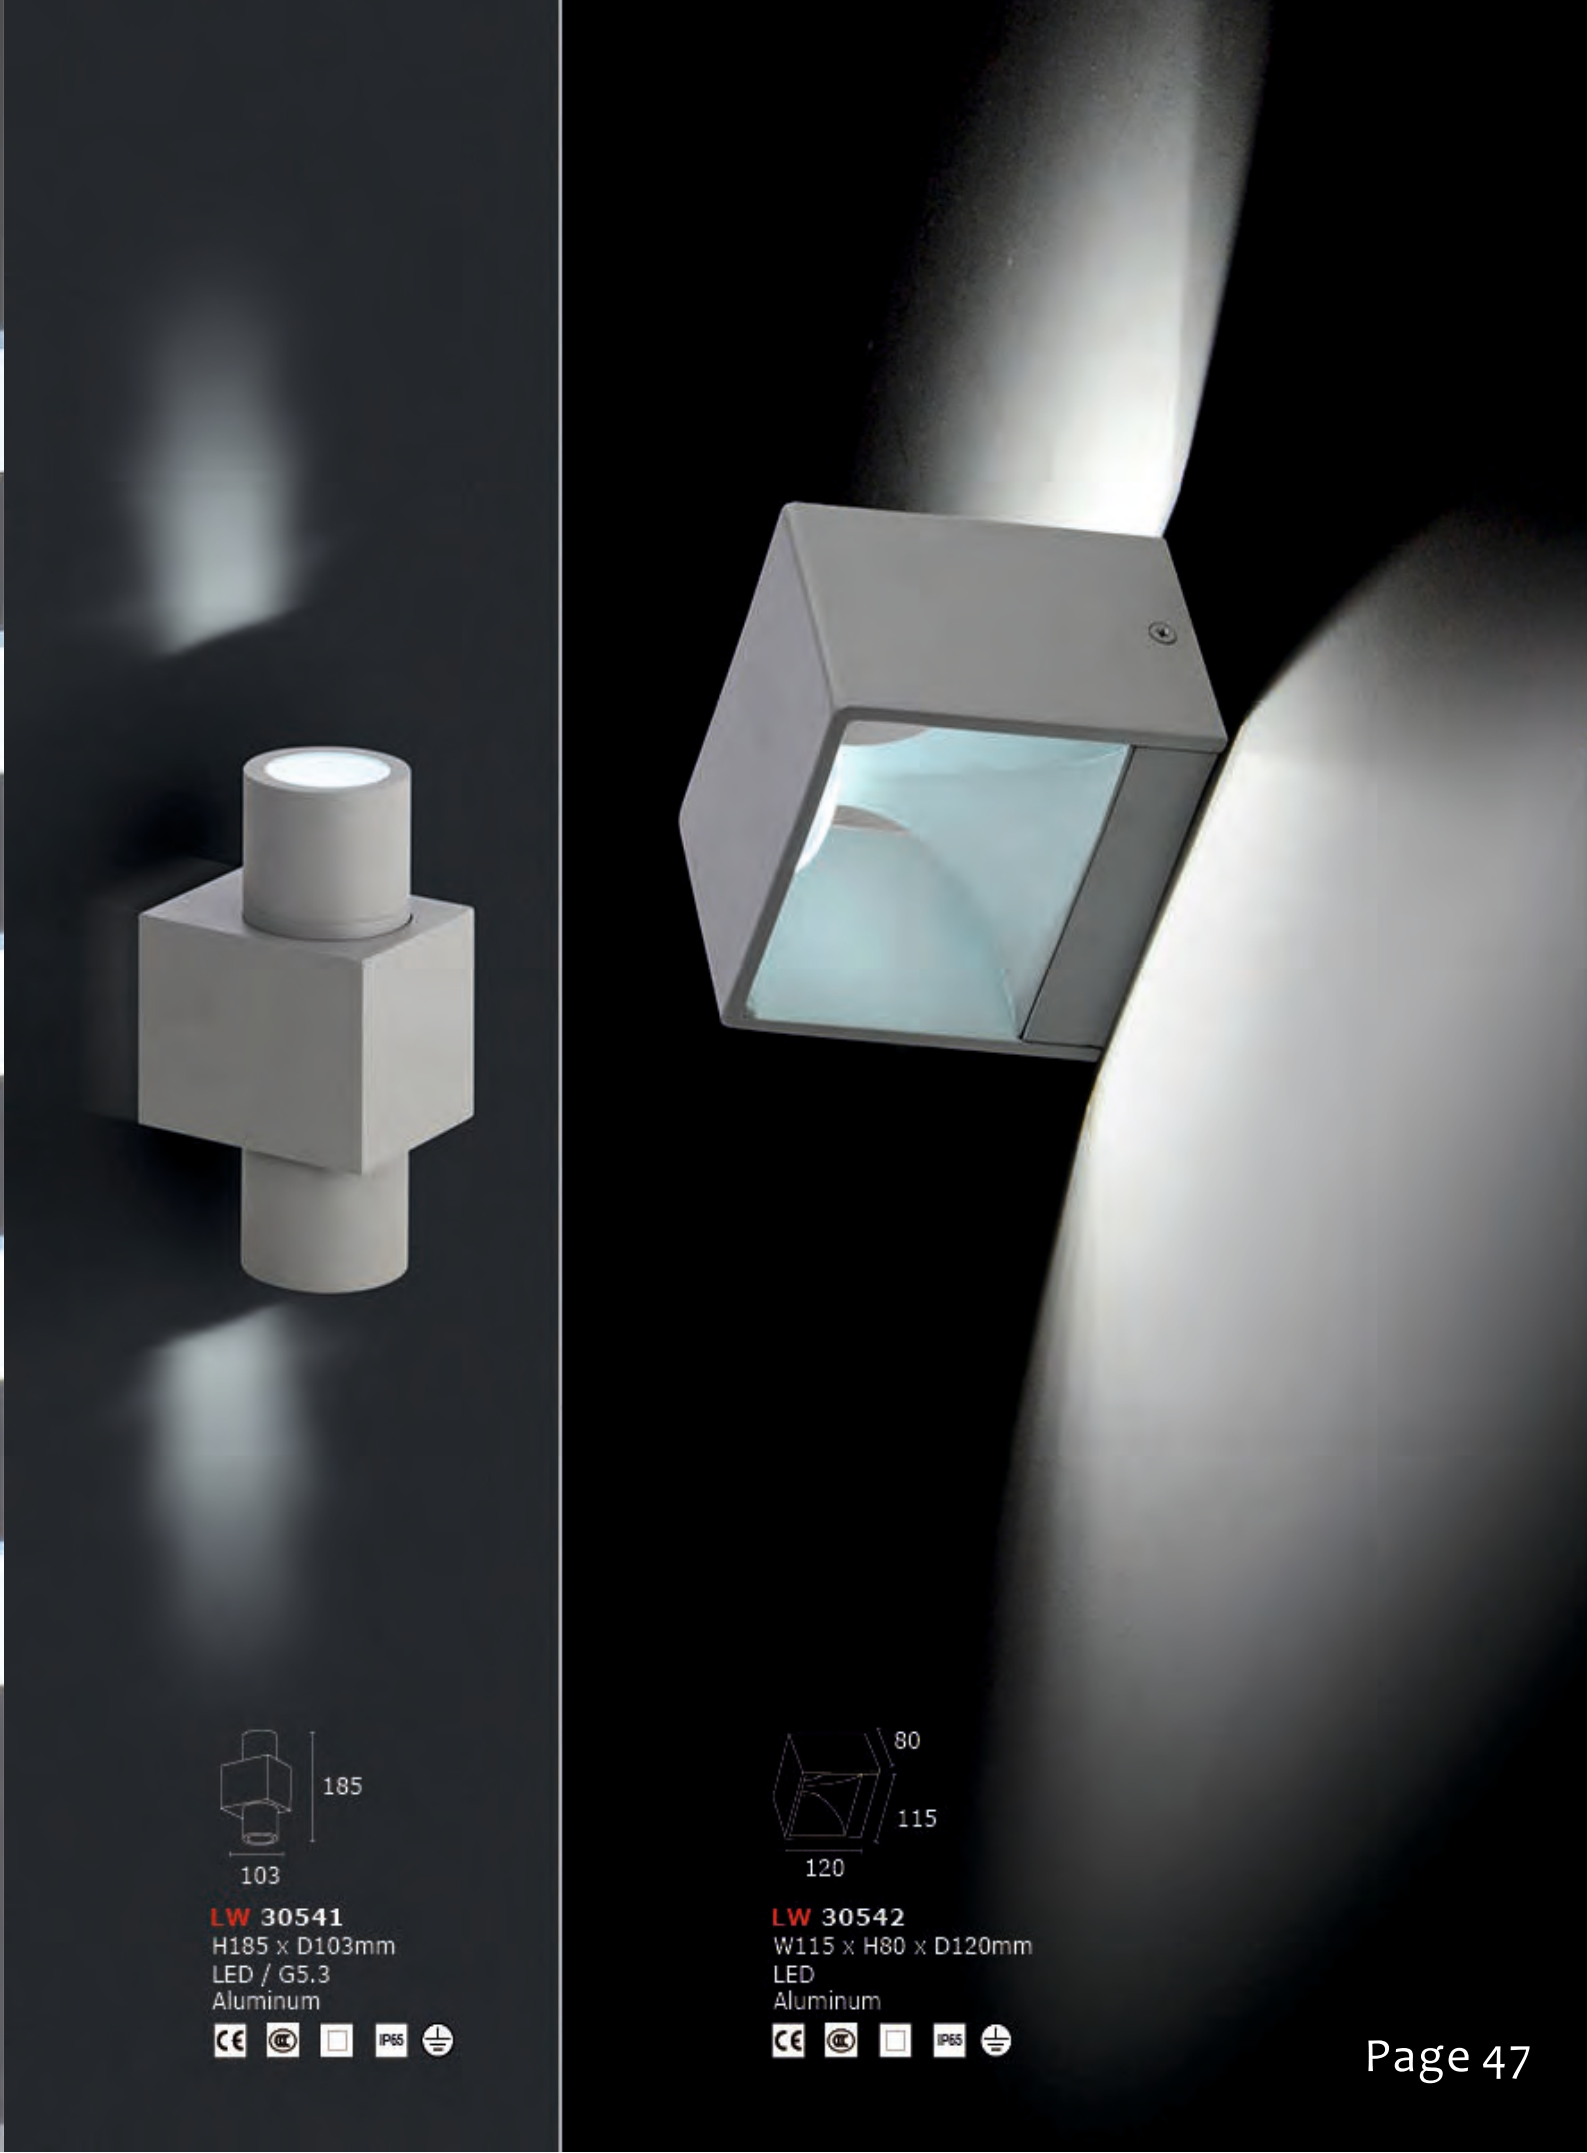




LW 30561
 L90 x W90 x H265mm
 G9 max 50W
 Aluminum
 CE CC IP65




LW 30562
 W110 x H250 x D175mm
 E27 x 13W
 Aluminum
 CE CC IP65





LW 30563
 L90 x W90 x H160mm
 G9 max 50W
 Aluminum
 CE CC IP65





LW 30711
 W205 x H205 x D70mm
 LED
 Aluminum
 CE CC IP65

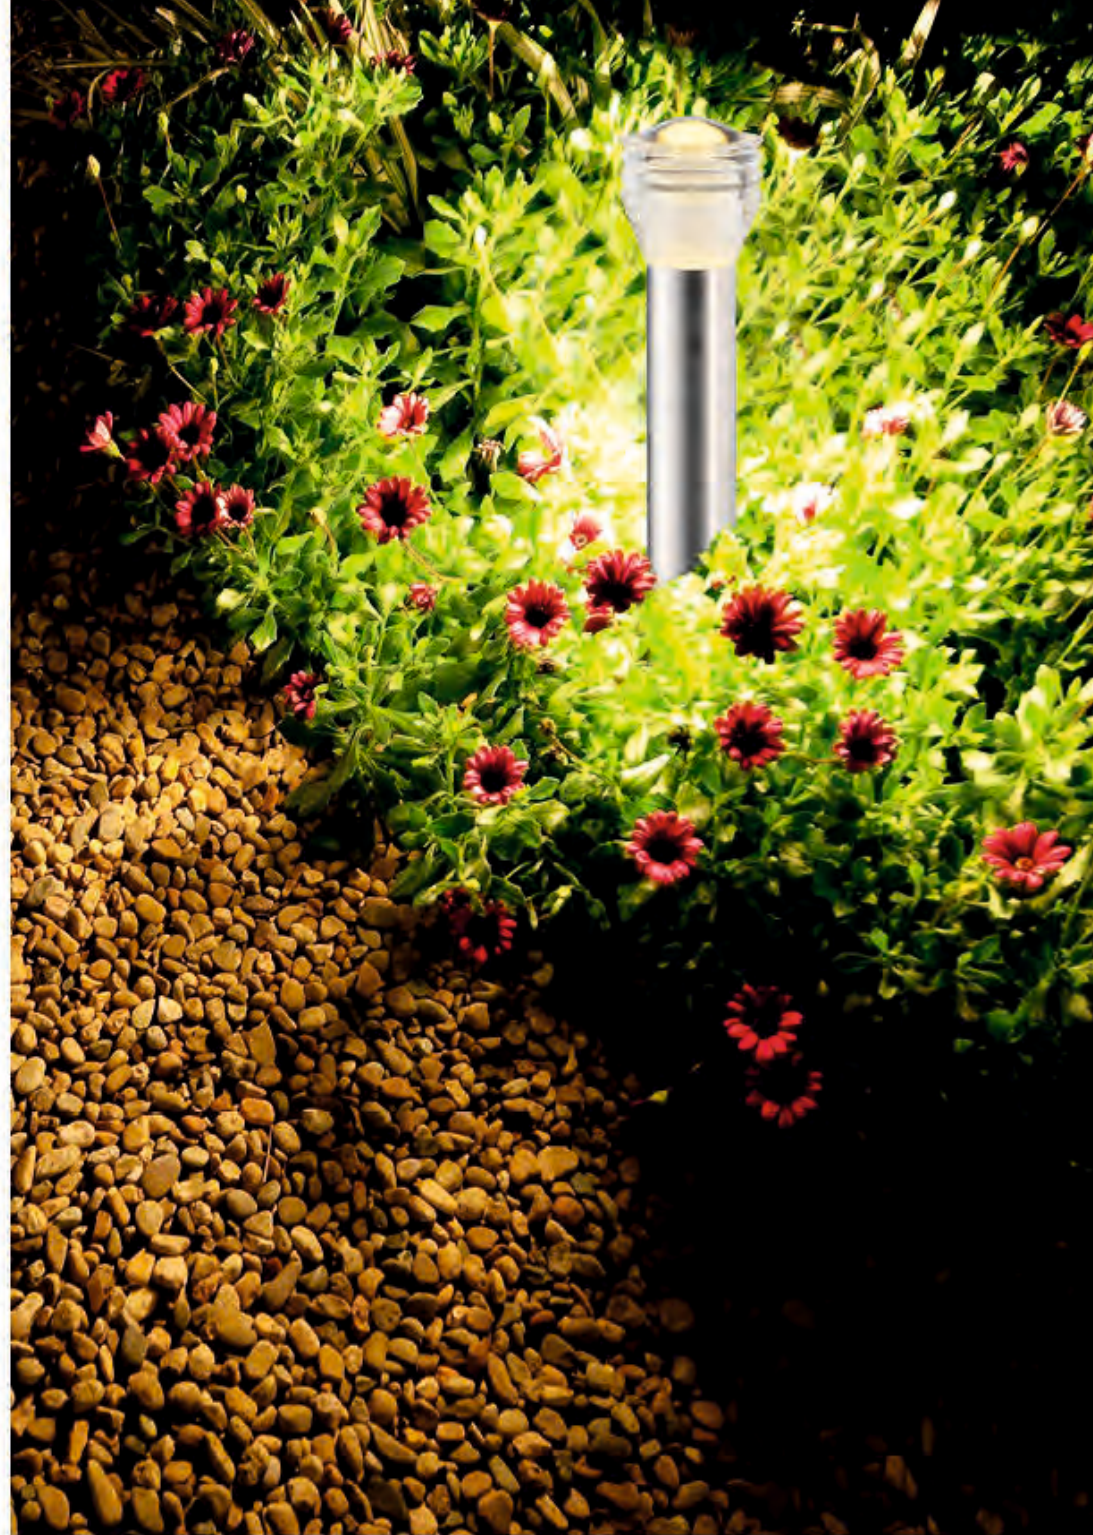


560
 Ø110
LW 31001
 Ø110 x H560mm
 LED
 Aluminum

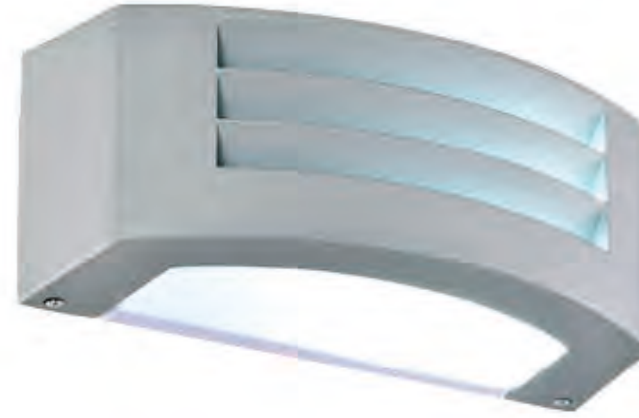

LW 2651
 W288 x H113 x D125mm
 E27 13W x 1
 Aluminum

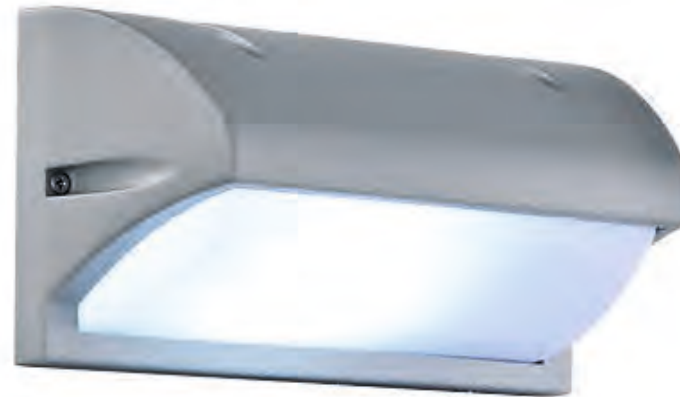

LW 2652
 W250 x H125 x D115mm
 E27 13W x1
 Aluminum



LW 2653
 W165 x H245 x D110mm
 E27 13W x1
 Aluminum





LW 30801
 Ø60 x H350mm
 MR16 / LED
 Aluminum
 CE, RoHS, IP65, ENEC



LW 30802
 Ø63 x H270mm
 G5.3 / LED
 Aluminum
 CE, RoHS, IP65, ENEC



LW 30803
 Ø98 x H290mm
 MR16 / LED
 Aluminum+Stainless
 CE, RoHS, IP65, ENEC



LW 30821
 Ø210 x H235mm
 G12
 Aluminum
 CE, RoHS, IP65, ENEC



LW 30822A/B/C
 A-Ø140 x H230mm
 B-Ø190 x H330mm
 C-Ø260 x H395mm
 LED
 Aluminum
 CE, RoHS, IP65, ENEC



LW 30823
 Ø83 x H130mm
 LED
 Aluminum
 CE, RoHS, IP65, ENEC



LW 2771
 Ø440 x H2200mm
 E27 13W x 1
 Aluminum



LW 2772
 Ø270 x H1700mm
 E27 13W x 1
 Aluminum



LW-0211



dimension:
 108



108 x 210 x 300mm
 E27 x 1 13W
 Aluminum





LW-0212 - A - B



dimension: A
 90




65 x 120 x 240mm
 A-90 x 200 x 300mm
 B-108 x 210 x 300mm
 E27 x 1 13W
 Aluminum

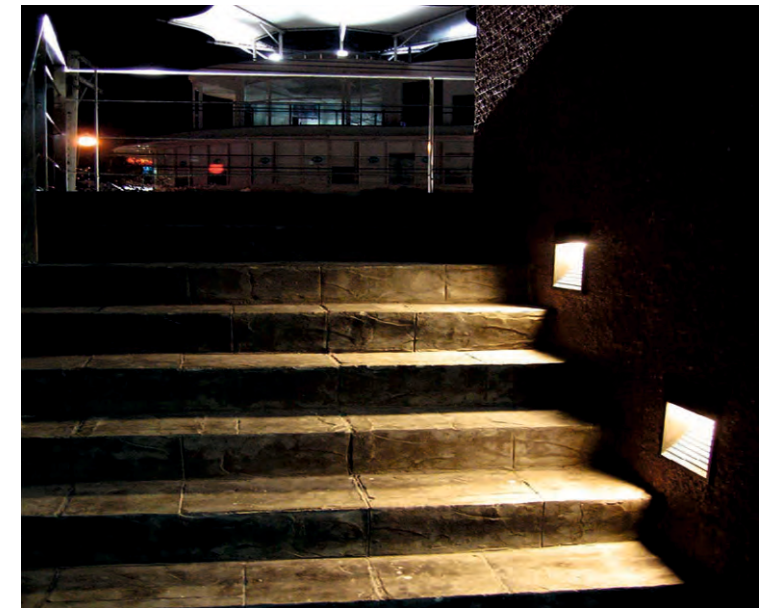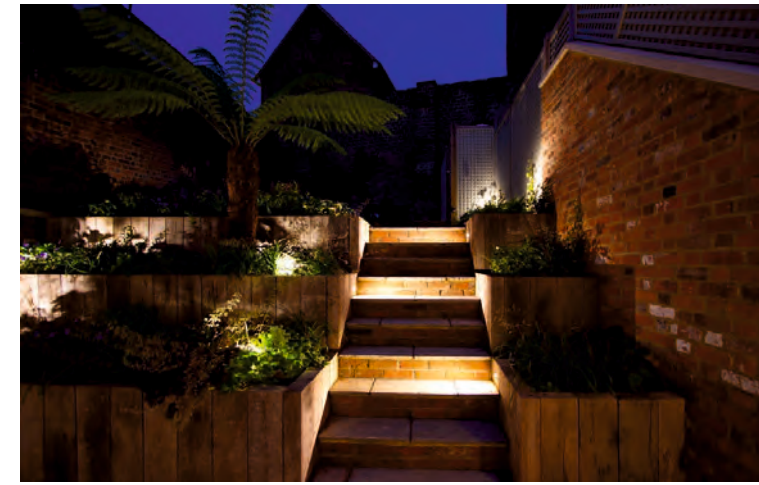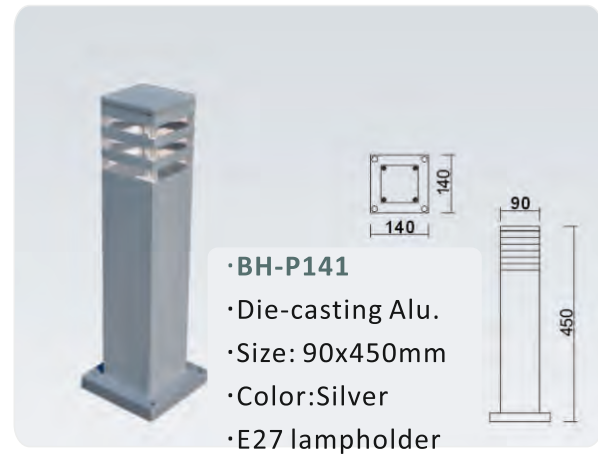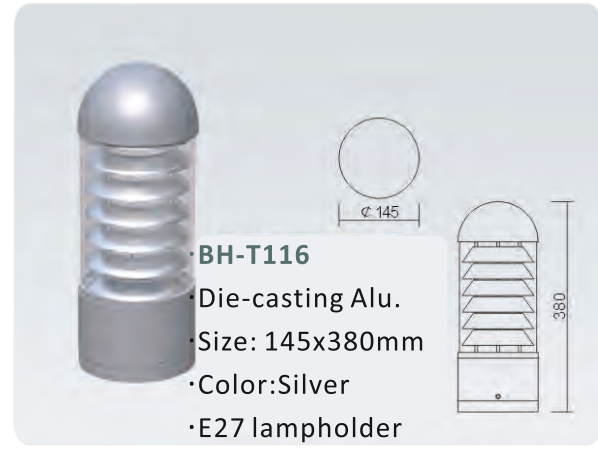



- **DM009**
- Die-casting Alu.
- Size: 180x100mm
- LED 9W
- CW 6000K

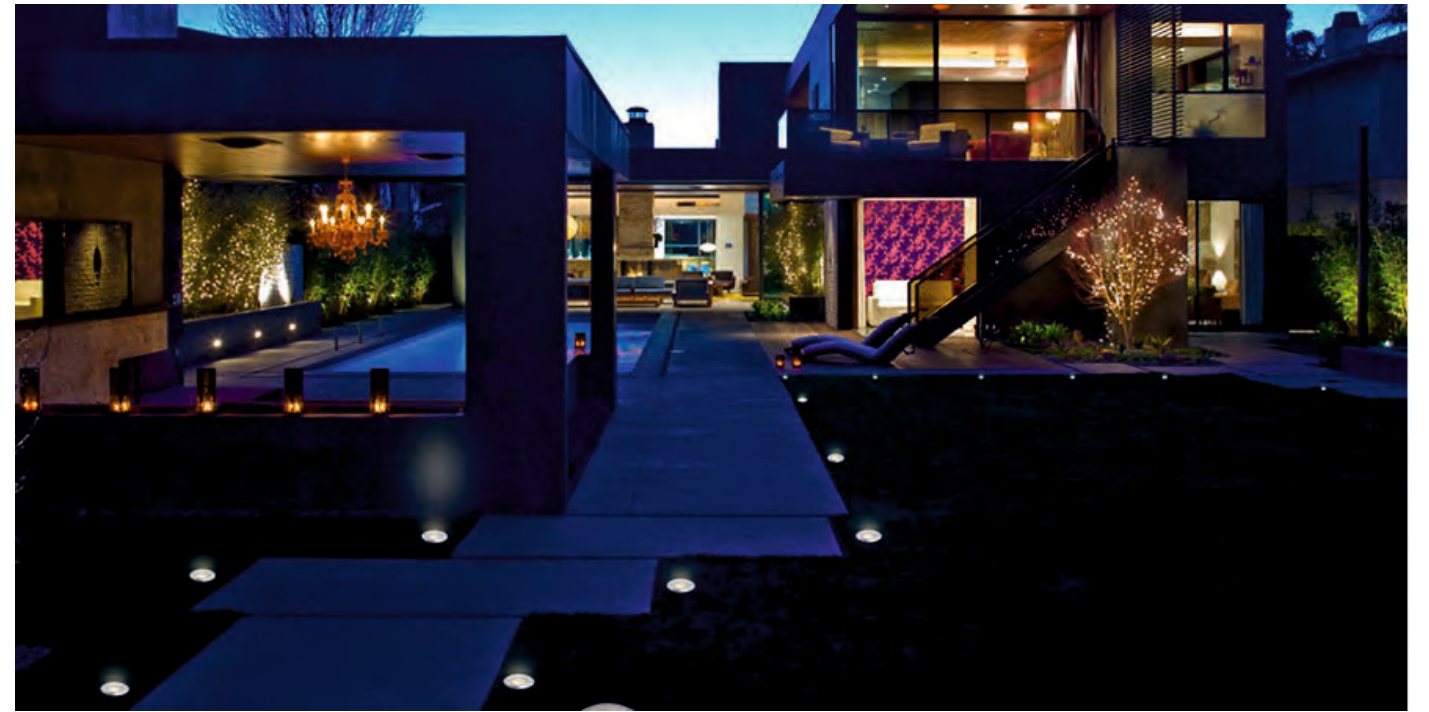

- **BH-M119**
- Die-casting Alu.
- Size: 103x160mm
- LED 3W
- CW 6000K



- **BH-9125**
- Die-casting Alu.
- Size: 100x120mm
- LED 3W
- CW 6000K



- **BH-9124**
- Die-casting Alu.
- Size: 100x120mm
- LED 3W
- CW 6000K





- HJ6002H
- Power :18W
- Size: Diameter 300mm
- White frame
- Color Temperature: CW 6000K



- HJ6002H
- Power :18W
- Size: Diameter 300mm
- Blue frame
- Color Temperature: RGB



Wall Mounted




Φ300*70mm




Recessed Type



- HJ6017S
- Power :18W
- Size: Diameter 280mm
- White frame
- Color Temperature: CW 6000K





- HJ6017S
- Power :18W
- Size: Diameter 280mm
- White frame
- Color Temperature: RGB

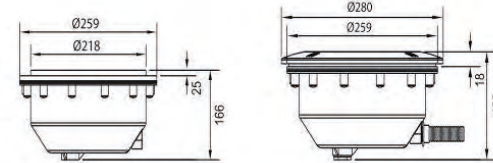

Φ 280*155mm




- HJ6032H
- Power :9W
- Size: Diameter 105mm
- Silver frame
- Color Temperature: CW 6000K / RGB

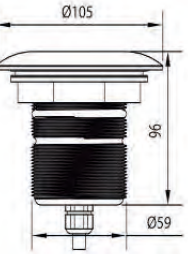

Φ105*95mm



- AC Transformer
- Power :300W
- For single color & RGB color Swimming Pool Light
- With EU Plug

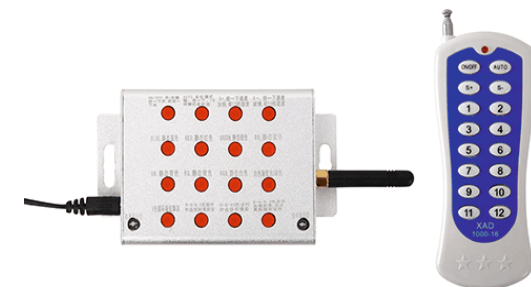

- HJ-0030
- Power :300W
- Remote Controller for RGB
- For RGB color Swimming Pool Light
- Control Distance:100m